


11.03.22

Victor cheinbare Chain

→ Probeklausuraufgaben
WTZZ - SRF

8. Aufgabenblatt

8.4)

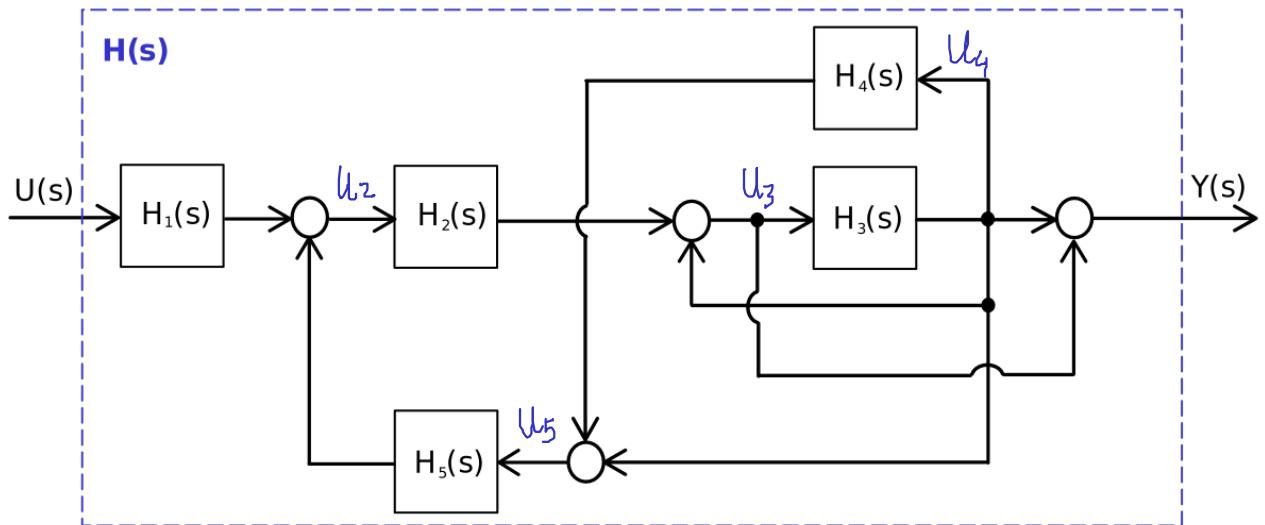

$$y(s) = u_3 + H_3 u_3 = u_3 (1 + H_3) \quad (\text{I})$$

$$u_2 = u_5 H_5 + u H_1 \quad (\text{II})$$

$$(\text{II}) \rightarrow (\text{III}) : u_3 = H_3 u_3 + H_2 (u_5 H_5 + u H_1)$$

2 Punkte
 $u_3 = H_3 u_3 + u_2 H_2 \quad (\text{III})$

$$u_3 = H_3 u_3 + H_2 H_1 u + H_2 H_5 u_5 \quad (\text{IV}) \quad 1 \text{ Punkt}$$

$$u_4 = H_3 u_3 \quad (\text{V})$$

$$(\text{IV}) \rightarrow (\text{V}) : u_5 = H_3 u_3 + H_4 H_3 u_3$$

$$u_5 = H_3 u_3 (1 + H_4) \quad (\text{VI}) \quad 1 \text{ Punkt}$$

$$u_3 = H_3 u_3 + H_2 H_1 u + H_2 H_5 (H_3 u_3 (1 + H_4))$$

$$u_3 = H_3 u_3 + H_2 H_5 H_3 u_3 + H_3 H_4 H_2 H_5 u_3 + H_2 H_1 u = u_3 H_3 (1 + H_2 H_5 + H_4 H_5 H_2) + H_2 H_1 u$$

$$u_3 (1 - H_3 (1 + H_2 H_5 + H_4 H_5 H_2)) = u H_2 H_1$$

$$u_3 = \frac{u H_2 H_1}{1 - H_3 (1 + H_2 H_5 + H_4 H_5 H_2)} \quad (\text{VII}) \quad 1 \text{ Punkt}$$


$$(\text{VII}) \rightarrow (\text{I}) : y(s) = \frac{u H_2 H_1 (1 + H_3)}{1 - H_3 (1 + H_2 H_5 + H_4 H_5 H_2)}$$

$H(s) = \frac{Y(s)}{U(s)} = \frac{H_2 H_1 (1 + H_3)}{1 - H_3 (1 + H_2 H_5 + H_4 H_5 H_2)}$
--

2 Punkte

$$8.5) \quad A_1 = 1 \quad B_1 = 1 \\ C_1 = 1 \quad D_1 = 0$$

$$\begin{aligned} A_2 &= 2 & B_2 &= 3 \\ C_2 &= 1 & D_2 &= 0 \\ \bar{A} &= \text{diag}(1, 2) \\ \bar{B} &= \text{diag}(1, 3) \\ \bar{C} &= \text{diag}(1, 1) = \text{id} \\ \bar{D} &= \text{diag}(0, 0) \end{aligned}$$

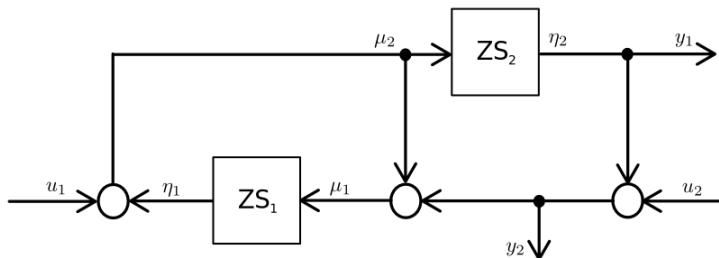

Verhalten der Blöcke

$$\begin{aligned} \dot{x}_1 &= A_1 x_1 + B_1 u_1 \\ y_1 &= C_1 x_1 + D_1 u_1 \end{aligned}$$

$$\begin{aligned} \dot{x}_2 &= A_2 x_2 + B_2 u_2 \\ y_2 &= C_2 x_2 + D_2 u_2 \end{aligned}$$

Verbindungen der Blöcke:

$$\begin{cases} M_1 = u_2 + \eta_2 + y_2 = u_2 + \eta_2 + v_1 + \eta_1 \\ M_2 = \eta_1 + v_1 \end{cases} \quad \text{1 Punkt}$$

$$\begin{cases} y_1 = y_2 \\ y_2 = u_2 + \eta_2 \end{cases} \quad \text{1 Punkt}$$

$$\eta = \begin{bmatrix} 1 & 1 \\ 1 & 0 \end{bmatrix} \eta + \begin{bmatrix} 1 & 1 \\ 1 & 0 \end{bmatrix} u \quad \text{1 Punkt}$$

Bedingung: $(\text{id} - k\bar{D})$ invertierbar

$$(\text{id} - k\bar{D}) = \text{id} - k \text{diag}(0, 0) = \text{id} \quad \text{1 Punkt}$$

$\det(\text{id}) = 1 \neq 0 \rightarrow \text{invertierbar!}$

⇒ Zusammenfassung: (Ergebnis von Prof. Reißig Verklausung)

$$\bullet A = \bar{A} + \bar{B} (\text{id} - k\bar{D})^{-1} \bar{C} = \bar{A} + \bar{B} \text{id}^{-1} k \bar{C} = \bar{A} + \bar{B} \text{id} k \bar{C} = \bar{A} + \bar{B} k \bar{C} = \bar{A} + \bar{B} k$$

$$A = \begin{bmatrix} 1 & 0 \\ 0 & 2 \end{bmatrix} + \begin{bmatrix} 1 & 0 \\ 0 & 3 \end{bmatrix} \begin{bmatrix} 1 & 1 \\ 1 & 0 \end{bmatrix} = \begin{bmatrix} 1 & 0 \\ 0 & 2 \end{bmatrix} + \begin{bmatrix} 1 & 1 \\ 3 & 0 \end{bmatrix} = \begin{bmatrix} 2 & 1 \\ 3 & 2 \end{bmatrix} \quad \text{1 Punkt}$$

$$\bullet B = \bar{B} \underbrace{(\text{id} - k\bar{D})^{-1}}_{= \text{id}} \cdot L = \bar{B} \cdot L = \begin{bmatrix} 1 & 0 \\ 0 & 3 \end{bmatrix} \begin{bmatrix} 1 & 1 \\ 1 & 0 \end{bmatrix} = \begin{bmatrix} 1 & 1 \\ 3 & 0 \end{bmatrix} \quad \text{1 Punkt}$$

$$\bullet C = E \underbrace{\text{id} + \bar{D}(\text{id} - k\bar{D})^{-1} \bar{C}}_{\bar{D} = 0} = E \text{id} \bar{C} = E = \begin{bmatrix} 0 & 1 \\ 0 & 1 \end{bmatrix} \quad \text{1 Punkt}$$

$$\bullet D = F + \bar{E} \underbrace{\bar{D}(\text{id} - k\bar{D})^{-1}}_{\bar{D} = 0} \cdot L = F = \begin{bmatrix} 0 & 0 \\ 0 & 1 \end{bmatrix} \quad \text{1 Punkt}$$

8.6) Verbindungen und Verhalten der Blöcke:

$$\begin{aligned} M_1 &= u & \dot{x}_1 &= A_1 x_1 + B_1 M_1 \\ M_2 &= u & \eta_1 &= C_1 x_1 + D_1 M_1 \end{aligned}$$

1 Punkt

$$y = \eta_1 + \eta_2$$

$$\begin{aligned} \dot{x}_2 &= A_2 x_2 + B_2 M_2 \\ \eta_2 &= C_2 x_2 + D_2 M_2 \end{aligned}$$


1 Punkt

$$\dot{x} = \begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \end{bmatrix} = \begin{bmatrix} A_1 & 0 \\ 0 & A_2 \end{bmatrix} x + \begin{bmatrix} B_1 \\ B_2 \end{bmatrix} u$$

$$y = [C_1 \ 0] x + D_1 M_1 + [0 \ C_2] x + D_2 M_2$$

$$y = [C_1 \ C_2] x + (D_1 + D_2) u$$

2 Punkte

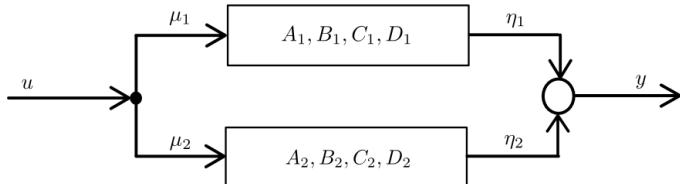

$$\begin{aligned} H_1(s) &= C_1 (s \text{id} - A_1)^{-1} B_1 + D_1, \quad H_2(s) = C_2 (s \text{id} - A_2)^{-1} B_2 + D_2 \\ \Rightarrow H(s) &= C_1 (s \text{id} - A_1)^{-1} B + D = \\ &= [C_1 \ C_2] \begin{bmatrix} (s \text{id} - A_1)^{-1} & 0 \\ 0 & (s \text{id} - A_2)^{-1} \end{bmatrix} \begin{bmatrix} B_1 \\ B_2 \end{bmatrix} + (D_1 + D_2) \\ &= (C_1 (s \text{id} - A_1)^{-1} B_1 + D_1) + (C_2 (s \text{id} - A_2)^{-1} B_2 + D_2) \\ &= H_1(s) + H_2(s) \end{aligned}$$