

Multi-Resolution, Semantic Objects, and Context for Road Extraction

A. Baumgartner¹, C. Steger², H. Mayer¹, W. Eckstein²

¹Lehrstuhl für Photogrammetrie und Fernerkundung
Technische Universität München
E-mail: {albert|helmut}@photo.verm.tu-muenchen.de

²Forschungsgruppe Bildverstehen (FG BV), Informatik IX
Technische Universität München
E-mail: {stegerc|eckstein}@informatik.tu-muenchen.de

Abstract

This paper presents a multi-resolution approach for automatic extraction of roads from digital aerial imagery. Roads are modeled as a network of intersections and links between the intersections. For different context regions, i.e., rural, forest, and urban areas, the model describes relations between background objects, e.g., buildings or trees, and road objects, e.g., road-parts, road-segments, road-links, and intersections. The segmentation of the image into context regions is done by texture analysis. The approach to detect roads is based on the extraction of edges in a high resolution image and the extraction of lines in an image of reduced resolution. Using both resolution levels and explicit knowledge about roads, hypotheses for roadsides are generated. The roadsides are used to construct quadrilaterals representing road-parts and polygons representing intersections. Neighboring road-parts are chained to road-segments. Road-links, i.e., the roads between two intersections, are built by grouping of road-segments and closing of gaps between road-segments. For the road-segments markings give highly reliable evidence. Road-links are constructed using knowledge about context.

Keywords: Road Extraction, Multi-Resolution, Context

1 Introduction

In digital photogrammetry there are operational automatic solutions for geometric tasks, e.g., measurement of fiducials, matching of points for relative orientation and generation of digital surface models. Semantic tasks, like data capture and update of geographic information systems (GIS), still have to be performed manually by a

human operator. This is very time consuming and expensive. Therefore, automatic solutions are highly desirable.

Research on the automatic extraction of man-made objects, like buildings or roads, from aerial or satellite imagery has been carried out since the seventies. These days more and more work focuses on automatic image interpretation for GIS (in this paper site-models are also regarded as a kind of GIS). Even though, for GIS update, i.e., verification and acquisition, old GIS data can make object extraction easier, the proposed approach is restricted to object extraction (here: roads) without using prior GIS information (for work in this area see, e.g., (de Gunst 1996, Wiedemann and Mayer 1996)). There are two reasons for this approach: Automatic extraction shows the potential and limits of an extraction scheme much better than GIS-guided extraction and can deepen the understanding of image interpretation. What is more, the extraction of new roads is needed for the update in any case.

A lot of work exists on the extraction of roads. The most common methods are extraction or tracking of lines in small scale imagery and profile matching or detection of roadsides in large scale images. The approaches combine different methods and incorporate additional knowledge, e.g., geometrical constraints, in various ways. A main criterion to distinguish the works is the interaction of a human operator. In semi-automatic schemes an operator selects an initial point and a direction for a road tracking algorithm (McKeown and Denlinger 1988, Vosselman and de Knecht 1995). In (Grün and Li 1996, Merlet and Zerubia 1996) the operator marks a few points of a road segment and an algorithm, e.g. based on dynamic programming, finds the road which connects these points (also in 3D for more than one image). This is advantageous because the path of the road is more constrained, and a more reliable handling of obstacles is possible. A similar approach based on so-called “ziplock” snakes is given in (Neuenschwander et al. 1995). These semi-automatic approaches can be extended to fully automatic operation by means of automatic seed point detection (Zlotnick and Carnine 1993). A fully automatic approach is presented in (Barzohar and Cooper 1996). Stochastic methods are used to find seeds for road extraction. Roads are found by dynamic programming based on a grey level model and on assumptions about the geometry of roads. In (Ruskoné et al. 1994) seed points for the extraction of the road network are centers of elongated regions found by a watershed-based segmentation on a gradient image. Based on the elongated regions and their directions, road segments are extracted using the homogeneity of the road surface. In order to extract the road network geometrical constraints are taken into account, and hypotheses about connections between road segments are checked.

If relations between roads and other objects, like cars, buildings, or trees, are neglected a reliable extraction is often difficult. Background objects can have a strong influence on the characteristics of roads, or at least on the appearance of roads in aerial imagery, e.g., high objects causing occlusions or casting shadows. Therefore, (Strat and Fischler 1995) strongly demand the use of contextual information to guide extraction algorithms for complex scenes. In (Ruskoné et al. 1996) the detec-

tion and grouping of cars is used for road extraction in urban areas where profile matching or detection of roadsides would probably fail. (Bordes et al. 1995) analyze the influence of context on the accuracy of roads in a cartographic database.

As distinct characteristics of roads can be detected best at different resolution levels and in different contexts, this paper proposes a multi-resolution extraction scheme integrating context information. The use of context allows to analyze road hypotheses more thoroughly and to deliver less erroneous results. For the generation of hypotheses for roadsides two resolution levels are used. Edges are extracted in a high resolution image and lines in an image of reduced resolution. Using both resolution levels and explicit geometrical and radiometrical knowledge about roads, hypotheses for roadsides are generated and quadrilaterals representing road-parts are constructed from them. Neighboring road-parts are chained, resulting in longer road-segments. Road-parts and road-segments are semantic objects with attributes and methods. The ability of road objects to explicitly represent a specific area also facilitates looking for additional evidence, e.g., road markings, which otherwise is very hard to find. Road-links, i.e., roads between two intersections, and intersections are built from road-parts and road-segments. The attributes and methods of road objects are not exactly the same all over the image but vary due to different contexts. To describe the different appearance of roads three types of so-called context regions are introduced: urban, rural, and forest. For each context region special relations between road objects and background objects are considered (so-called context sketches).

In Section 2, the road model and relations between roads and background objects are described. Section 3 shows the fusion of different resolution levels for the extraction of roadsides and the construction of road objects, along with their attributes and methods. The segmentation of the image into different context regions based on texture analysis, and how the context information is used, is explained in Section 4. Finally, in Section 5 conclusions are given.

2 Model

In order to extract roads it is necessary to have a clear idea about the concept *road*. Hence, a model should comprise explicit knowledge about road width, parallelism of roadsides (geometry), reflectance characteristics (radiometry), network structure (topology), and relations to other objects like buildings or trees (context). The model described below is split into two parts. One part describes characteristics of roads (Sect. 2.1). The other part defines relations to background objects, called context sketches here, and assigns these relations to different context regions (Sect. 2.2). In this way the complex model of the object *road* is divided into more specific sub-models which are adapted to contextual environment (urban, suburb, rural, forest), sensor, and scale (resolution). The sub-models emphasize certain characteristics of the objects and therefore can be regarded as specialized models.

2.1 Model of Road Objects

Roads in Real World: In the real world, the characteristics of roads can be described as consequence of their function for human beings (Stark and Bowyer 1991). Roads make space accessible and therefore exhibit the form of a network connecting all areas inhabited and used by human beings. The denser an area is inhabited and the more intensive it is used, the denser is the road network of the area. Corresponding to their importance, network components are classified into a hierarchy of different categories with different attributes. Roads of national importance, i.e., highways, are much wider than roads accessing agricultural or forest areas. Their relation with the terrain surface differs according to their function and category. Agricultural paths and less important feeder roads are more closely following the natural terrain surface than highways do, the latter ones serving as fast connections between densely settled areas. Roads of different categories therefore differ with respect to minimum curvature radius and maximally allowed slope. As a consequence of greater curvature radius and more gentle slope it happens more often that roads of a greater importance run along embankments, over bridges or in tunnels. On closer inspection, distinct parts of roads can be attributed by the type of surface material, the existence and type of road markings, or the existence of sidewalks and cycle-tracks.

Roads in Aerial Images: The appearance of roads in digital imagery strongly depends on the sensor's spectral sensitivity and its resolution in object space. Usually roads show up with specific grey-values, especially in color and infra-red images. The remainder of this paper is restricted to grey-scale images and only scale dependencies are considered. Images with varying resolution show different characteristics of roads. In images with low resolution, i.e., more than 2 m per pixel, roads mainly appear as lines establishing a more or less dense network. Opposed to this, in images with a higher resolution, i.e., less than 0.50 m, roads are depicted as elongated homogeneous areas with more or less parallel borders and almost constant width. Usually the brightness of roads is different from the surroundings and therefore the roadsides can be extracted using edge detectors. In the higher resolution the attainable geometric accuracy is better, but background objects like cars, trees, and buildings disturb the road extraction to a higher degree.

In a smoothed image — which corresponds to a reduced resolution — lines representing road axes can be extracted in a stable manner even in the presence of those background objects. Figure 1a) displays a bar shaped bright line (= road) with a bright disturbance (= car) on it and its behavior in scale-space for the line extraction model presented in (Steger 1996). In Figure 1b) the position of edge and line points at different scales is plotted against their ideal position.

For small σ the extracted line position will be determined by the bright object, while for large σ it will correspond to the center axis of the road. Therefore, simply by increasing σ one can eliminate the car from the road. It can also be seen that the two edges corresponding to the bright object will vanish along with the flat inflection points on the undisturbed part of the line. As (Mayer and Steger 1996) have shown,

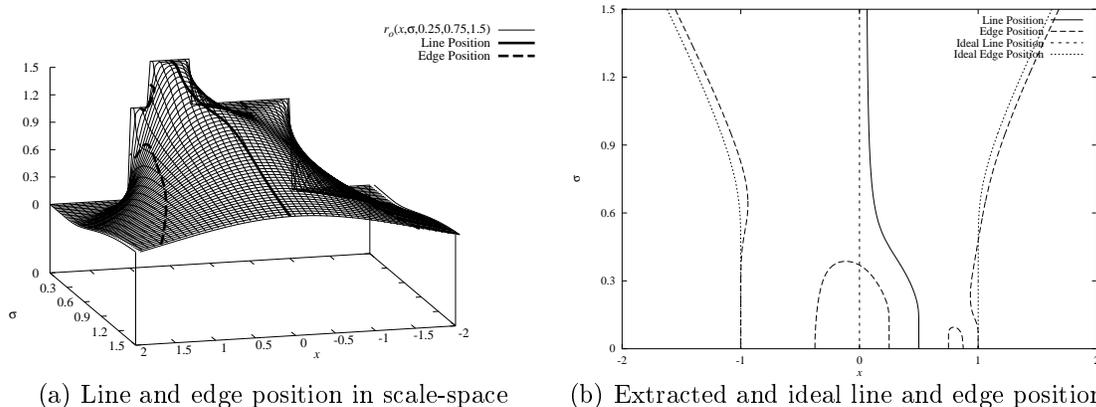


Fig. 1: Scale-space behavior of a line with a bright disturbance on it.

the appropriate scale for line extraction can be computed, if the width of the line (=road) and of the disturbance (=car) as well as the contrast between background, line, and disturbance is given. Seen from a symbolical point of view, in the larger scale the substructure of the road (the car on the road or also objects like markings) has been eliminated. This can be interpreted as the *abstraction*, i.e. the increase of the level of simplification and emphasis of the road. Abstraction is achieved simply by changing the scale of the object (Mayer and Steger 1996).

Road Model: From the last paragraph follows that fusion of low and high resolution results can contribute to improve the reliability of the road hypotheses. Additionally, details like road markings, which can be recognized at a resolution of less than 0.20 m, can be used as evidence to corroborate the detected road hypotheses. On the one hand, using multiple resolution levels improves robustness of road extraction. On the other hand, it results in the necessity to use different features at each resolution level, and to simultaneously combine all features of all resolution levels into one road model. The semantic network in Figure 2 illustrates the road model condensed from this.

The model is split into three levels, defining different points of view. The *real world* level consists of the objects and their relations on a natural language level. The road of this level consists of intersection and road-link, which connects intersections. The road-link is constructed of short parts, the road-segments. In large scale the road-segment is constructed of road-parts (for the motivation of their use see Sect. 3.2) which in turn comprise the pavement and the markings (solid or dashed). The objects in the *real world* level are connected to the objects in the *geometry and material* level by means of the *concrete* relation which connects *concepts* describing the same object on different levels, i.e., from different points of view. The *geometry and material* level is an intermediate level which represents the three-dimensional shapes of objects as well as their material (Tönjes 1996). This level has the advantage that it represents objects independently from sensor characteristics and viewpoint, which is in contrast to the *image* level.

Road-segments in small scale are linked to a mostly straight bright line in the *image* level. In contrast to this, the pavement of the large scale is linked to the elongated bright area in the *image* level via the elongated flat concrete of asphalt area in the *geometry and material* level. The markings are related to bright lines via colored lines.

Whereas the large scale gives detailed information, the small scale adds global information. If the information of both levels is fused, false hypotheses for roads are eliminated by using the abstract small scale information, while integrating details from the large scale (e.g., the correct width of the roads). With this, the advantages of both scales are merged.

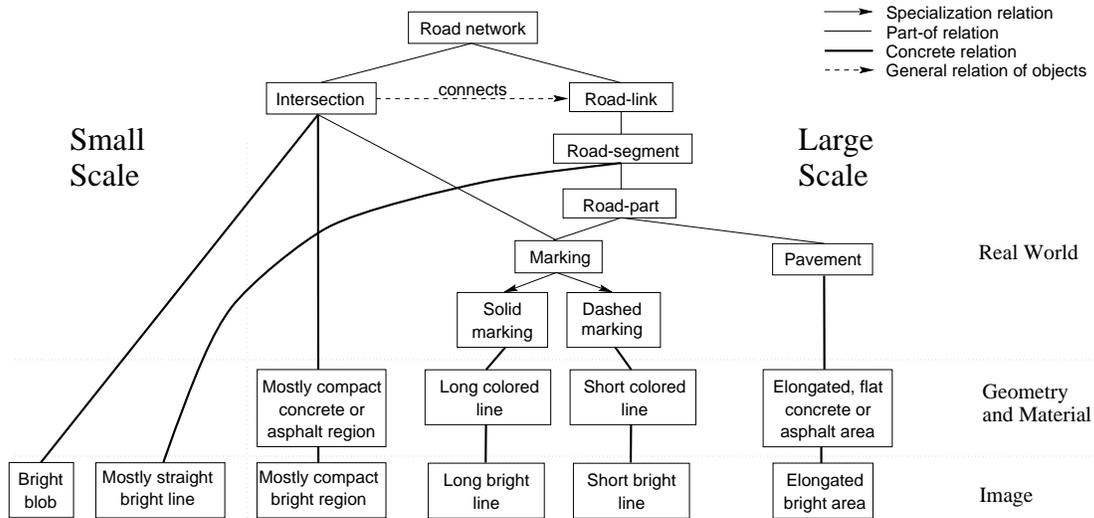


Fig. 2: Road model: different resolutions and points of view

2.2 Context

The road model of the last section comprises knowledge about radiometric, geometric, and topological characteristics. But besides features which refer to the road itself, it is also necessary to consider relations between roads and other objects like buildings, trees, and cars. This is, because these background objects on the one hand support and on the other hand hinder road extraction.

Context Sketches: The notion “context sketch” is introduced to describe typical relations between road objects and background objects. The context sketch *occlusion_shadow* consists of a hypothetical road-part which connects two road-segments and a high object next to the hypothetical road-part. Figure 3a) illustrates an occlusion, and Fig. 3b) a shadow cast onto the road by a high object. Another context sketch describes the relation between road-segments and driveways to agricultural fields (*rural_driveway*). Figure 4a) explains the situation where a driveway causes a gap between two road-segments and only one roadside is found. The context sketch

vehicle_road describes a dark or bright blob on a road-part or on a road-segment. To be a vehicle the blob must have a certain size and it should not be centered on the road (cf. Fig. 4b). The context sketch *building_driveway_road-segment* models the relations between a road-segment, a driveway (i.e., a small and short road-part), and a building at the end of the driveway. The driveway is often almost perpendicular to the road-segment and the building is in many cases parallel to the road-segment. The relation between roads and parallel objects, like sidewalks and cycle-tracks, is defined by the context sketch *parallel_object*.

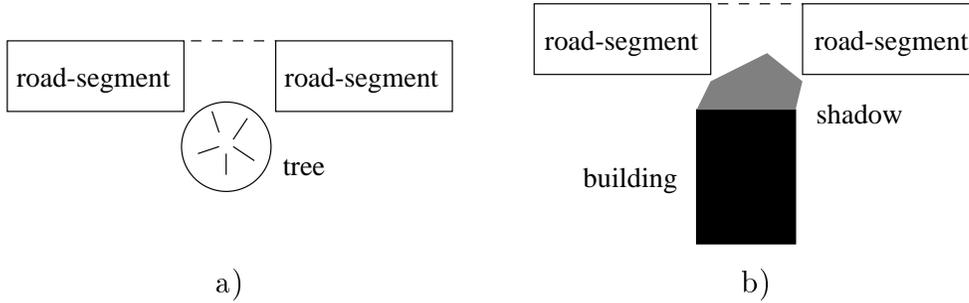


Fig. 3: Context sketch *occlusion_shadow*

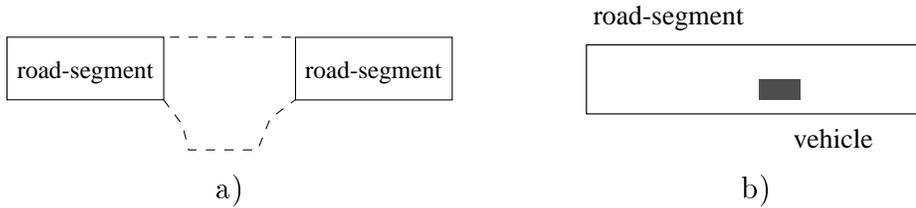


Fig. 4: Context sketches: a) *rural_driveway* b) *vehicle_road*

These basic context sketches are modules that can be aggregated into more complex context sketches depicting, e.g., the interaction between *building_driveway_road-segment* and *occlusion_shadow* or the interaction between *building_driveway_road-segment* and *vehicle_road*.

Context Regions: Not every context sketch always has to be taken into account. This is in contrast to approaches representing the whole scene with one model (Matsuyama and Hwang 1990). The relevance of features and relations depends also on the global context. Roads in urban or suburban areas look quite different and have other relations than roads in rural or forest areas. Therefore, this paper proposes to use different features and relations, i.e., context sketches, not only at multiple resolution levels but also within so-called context regions, for which *suburb_urban*, *forest*, and *open_rural* areas are distinguished here. Information from a GIS or a (pre-)segmentation of the image into these regions provides global a priori information about the characteristic features and their relations. For example, buildings

in downtown areas are — in contrast to buildings in rural areas — very close and highly parallel to roads; sidewalks and cycle-tracks are more likely to appear in urban areas; in rural areas single trees and single buildings might hinder extraction, whereas in forest regions mainly shadows and occlusions pose problems. This information about existence or proximity of background objects makes it possible to choose the most appropriate extraction algorithm and to determine the meaning of distinct road-parts and road-segments. The assignment of the context sketches to context regions is shown in Figure 5.

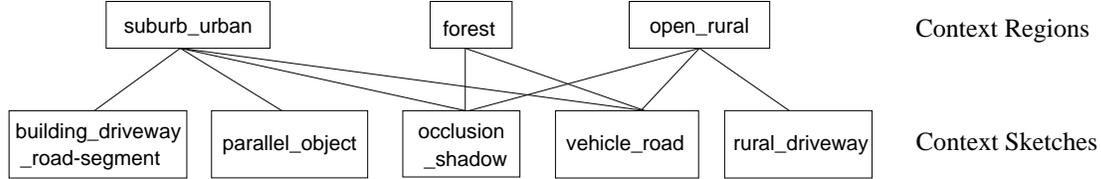


Fig. 5: Context regions and context sketches for roads

3 Strategy

The main principle in the proposed extraction scheme is to guide road extraction by given information. Therefore, the most salient objects are extracted first. Depending on the area where roads are to be extracted, different features are easiest to detect. In urban and forest areas radiometric and geometric knowledge alone is not sufficient due to shadows and occlusions. On the other hand, with a simple model, relying only on attributes of the road itself, good results are expected for rural areas. According to these considerations the road extraction starts in rural areas mainly based on low level algorithms. The intermediate results after this step can then serve to guide road extraction in urban and forest areas. To enable the reasoning in object space (i.e., to use information about the scene in meters and not in pixels), the road extraction is done in an orthophoto. This gives enough information in most cases, since roads are planar objects. According to the considerations explained above, not only images at original resolution but also images at reduced resolution are used. A segmentation of the image into different context regions is achieved by texture analysis in the image of reduced resolution. In a first step, roadsides are extracted using a multi-resolution approach, which integrates edge extraction in a high resolution image and line extraction in a low resolution image (Sect. 3.1). In a second step, road objects, like road-parts, road-segments, and intersections, are constructed from the roadsides (Sect. 3.2). The road objects have attributes and methods to enable a more sophisticated examination of reasons for gaps between road-parts and road-segments. The role of context information for road extraction is shown in Section 4.

3.1 Extraction of Roadsides

Low Resolution: Lines “Low resolution” in this context means that roads are only a few pixels wide and appear as bright or dark lines. Therefore, the resolution considered as “low” depends on the width of the roads in the imagery. If the road width varies widely in an image, e.g., between 4 m (path) and 30 m (highway), more than one “low resolution” level, e.g., one for paths and normal roads and one for highways, would be needed.

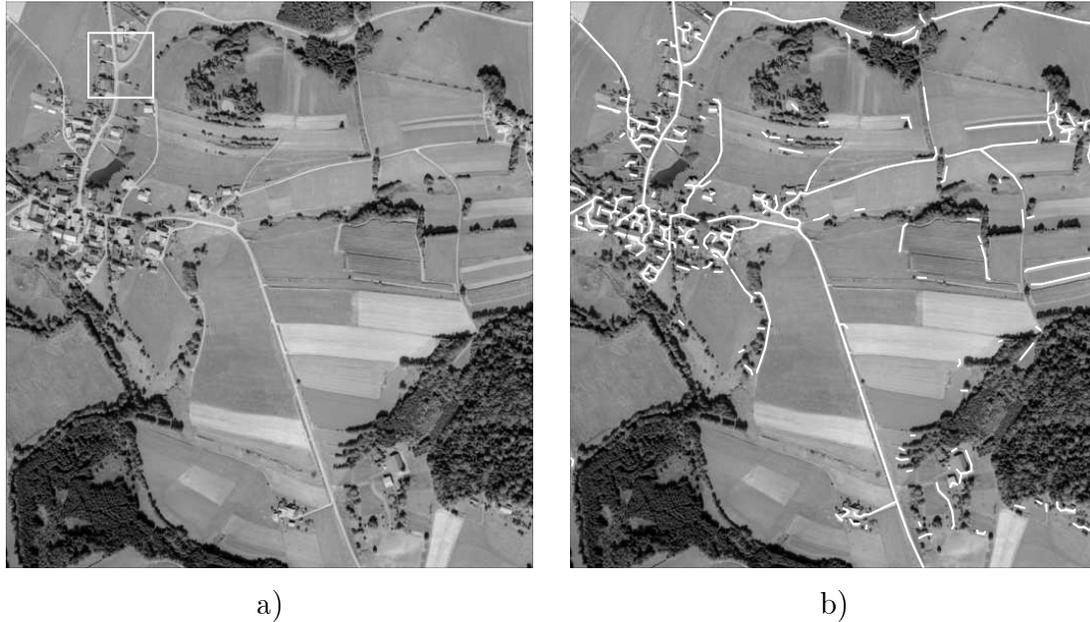


Fig. 6: a) Image at low resolution. b) Hypotheses for road axes at low resolution.

Figure 6a) shows a version of reduced, i.e., low resolution of an image. The ground resolution is 2 m. Bright lines are extracted with an approach based on differential geometrical properties of the image function. Points which have a vanishing gradient and a high curvature in the direction perpendicular to the line are considered as line points and linked to contours. The contours are approximated by polygons which are hypotheses for road axes (cf. Fig. 6b).

High Resolution: Edges At high resolution roads are modeled as bright homogeneous areas bordered by parallel edges. Edges are extracted from the original image and approximated by polygons. The polygons are grouped into relations of pairs of parallels, and the area enclosed by the parallels is examined. The result of this process are hypotheses for roadsides at the high resolution level. Details are given in (Steger et al. 1995).

Fusion of Low and High Resolution As motivated in Section 2.1, the results should be fused, to make optimal use of the advantages of both resolution levels. Input for fusion are hypotheses for road axes from low resolution (cf. Sect. 3.1), hypotheses for roadsides from high resolution, and the original edge polygons. The

basic strategy is to select the results of both levels supporting each other. Hypotheses for roadsides which enclose a homogeneous area and have a hypothesis for a road axis in-between serve as initial hypotheses. Further roadsides are extracted gradually according to several rules. Figure 7a) shows the input to fusion. The final roadside hypotheses are presented in Figure 7b).

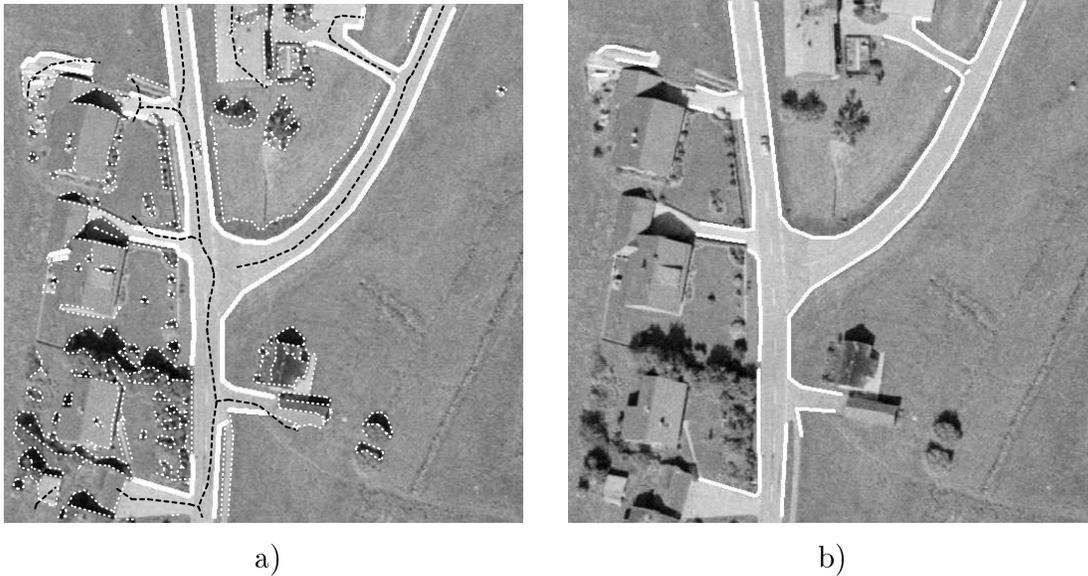


Fig. 7: a) Input to the fusion process: hypotheses for road axes (dashed, black), hypotheses for roadsides (solid, white) and other edges (dotted, white). b) Final roadside hypotheses.

3.2 Extraction of Semantic Objects

The results obtained in the last section can be regarded as mid-level segmentation results. This means, that even if they look like roads in Figure 7b), they have not been extracted so far; candidates for roadsides have been found. In order to facilitate further processing, semantically meaningful objects with rich attributes have to be generated.

As shown in Figure 2, the road network consists of *intersections* and *road-links* and can therefore be regarded as a graph. However, it is rarely possible to extract a single connected road-link between two intersections because of occlusions and other problems. Therefore, the concept *road-segment* is used to describe a single, connected piece of road detectable in the image. At low resolution this concept corresponds directly to the bright lines extracted by the method described in Section 3.1. At high resolution a road-segment can be described by its enclosing polygon. However, it is quite difficult to generate this polygon directly in a topologically correct way. Therefore, *road-parts* are introduced as intermediate concepts. They have a simple geometric description, namely the minimal quadrilateral built by two parallel and

overlapping roadsides. Road-segments can then simply be created by aggregating adjacent road-parts. Similarly, at low resolutions intersections are junctions of more than two lines. Conversely, at high resolution they are regions described by their enclosing polygon.

Extraction of road-parts: The first step to generate the different types of road objects is to generate road-parts from the results obtained in Section 3.1. This is done by splitting the parallels into non-overlapping quadrilaterals by projecting each point of the left and right parallel polygons perpendicularly onto the other polygon. Each road-part is described by the four points of the quadrilateral. Furthermore, there are functions in the corresponding class to calculate the center axis of each road-part, and to convert the road-part into a region in the image. The latter point facilitates the selective extraction of features on the road-part, e.g., road markings. Figure 8a) shows the extracted road-parts.

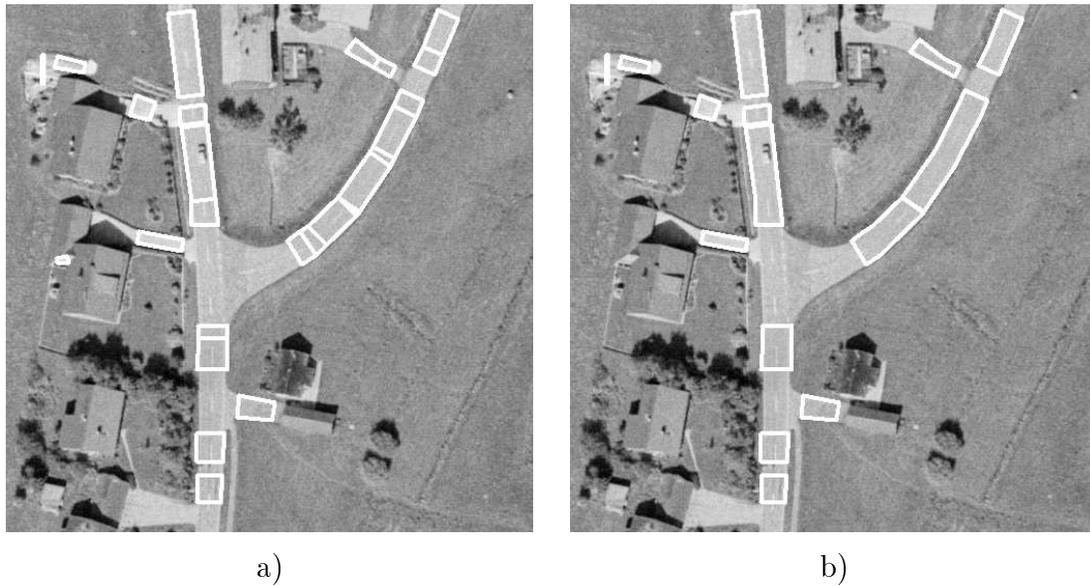


Fig. 8: a) Road-parts b) Road-segments

Aggregation of road-parts into road-segments: When the road-parts have been extracted, it is straightforward to group them into road-segments by collecting all adjacent road-parts. The road-segments inherit much of their attributes and functionality from their constituting road-parts, e.g., the abilities to generate their center axis, and to be converted into regions. Figure 8b) shows the road-segments generated from the road-parts in Figure 8a). It is apparent that most of the roads are correctly extracted. It can also be seen that sometimes the generation of road-parts fails to cover the entire area between parallels because at some areas no quadrilaterals can be generated, especially in highly curved areas. However, this can easily be corrected. The road-segments thus created can be aggregated into road-links by grouping processes. As this is context-dependent, it will be described in Section 4.

Extraction of intersections. In Figure 2 intersections are areas in the image

where more than two road-links meet. At low resolution they are points where three or more lines meet (junctions). At high resolution they are complicated objects defined by their enclosing polygon. Candidates for this polygon are the roadsides remaining after the above steps which border a road-like region, but are not parallel. However, to find out which roadsides belong to a particular intersection is not trivial. For this task information from the low resolution level is used. Hypotheses for intersections are junctions from the road network graph. Since the line detector fails to extract junctions under predictable circumstances, the algorithm completes the graph by adding junctions at places where a line end is very close and almost perpendicular to another line. The lines adjacent to the junction are then examined whether they cross road-segments at high resolution. This procedure yields road-segment candidates for a particular intersection. Since the lines adjacent to a junction can be quite long, and cross several road-segments at high resolution, the closest road-segments on each line are selected as belonging to the intersection. They define a search area for the enclosing polygon of the intersection. Polygons in this area are then aggregated to the enclosing polygon of the intersection by tracing them from the end points of the adjacent road-segments, and if necessary, by closing gaps where no roadsides or edges were found. Figure 9a) shows the road-segments and the network graph derived from low resolution, while Figure 9b) displays the extracted intersection polygons. As can be seen, this procedure works quite well for the case of junctions where three road-segments meet. When four or more road-segments form the intersection the procedure has to be slightly modified, since the line extractor will usually extract two closely adjacent junctions of three lines in this case. Like road-segments, intersections have a rich set of attributes (e.g., the adjacent road-segments) and functions (e.g., they can be converted into discrete regions for low level processing).

4 Role of Context

4.1 Context Regions

As described in Section 2.2, context regions provide additional global information enabling a more efficient use of knowledge about roads. To construct the context regions, available GIS data can be used. As the GIS data can be outdated, it should be compared with information from images, e.g. from a segmentation. If the borders of GIS regions and the segmented regions do not differ too much, the GIS borders are supposed to be correct. Otherwise the borders of context regions are taken from the segmentation. In cases where there is no GIS data available, the context regions can be obtained from the segmentation alone. A segmentation of the aerial image into the context regions *open_rural*, *forest*, and *suburb_urban* area can be achieved by texture analysis. The texture features which can be used depend on the resolution of the image. The main textural characteristic of *open_rural* area in low resolution is homogeneity. Besides edges at the borders of fields or meadows as well as next to roads, there is almost no contrast in this context region. On the other hand in *forest* and *suburb_urban* areas the texture energy is much higher. Therefore, the

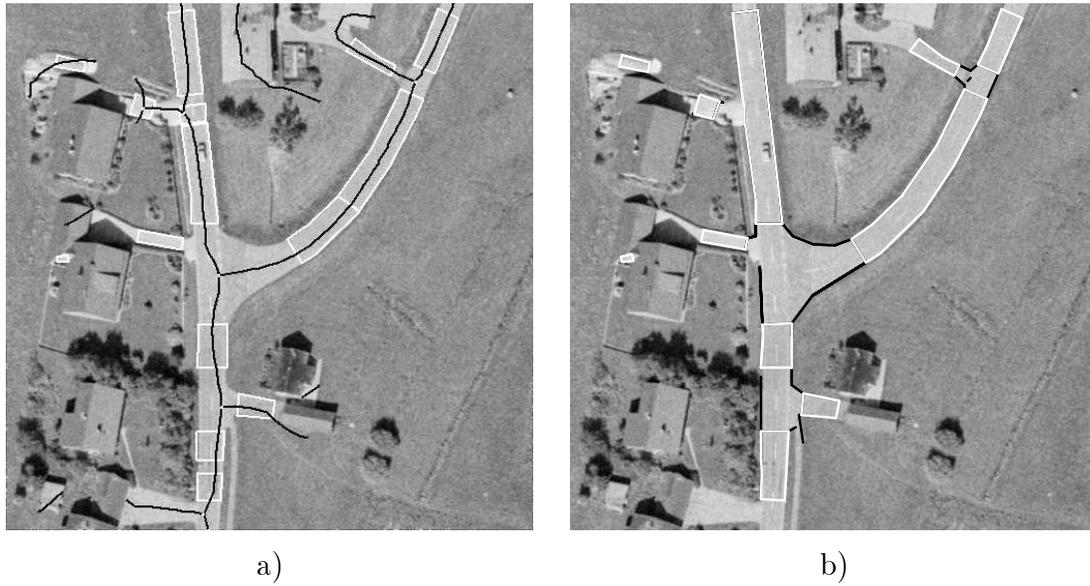


Fig. 9: a) Road-segments (white), lines (black) and junctions (white points). b) Polygons of intersection areas (black) and road-segments (white).

segmentation of *open_rural* area is not too difficult using the texture energy derived from images at a resolution of 4 m filtered with masks proposed in (Laws 1980). However, at this resolution a reliable distinction between *forest* and *suburb_urban* area by texture energy alone is not possible and has to be done by other criteria and/or at higher resolution. A quite simple but efficient way is thresholding of the original grey-values and application of morphological operations on the results of the thresholding. Figure 10 shows results of the segmentation.

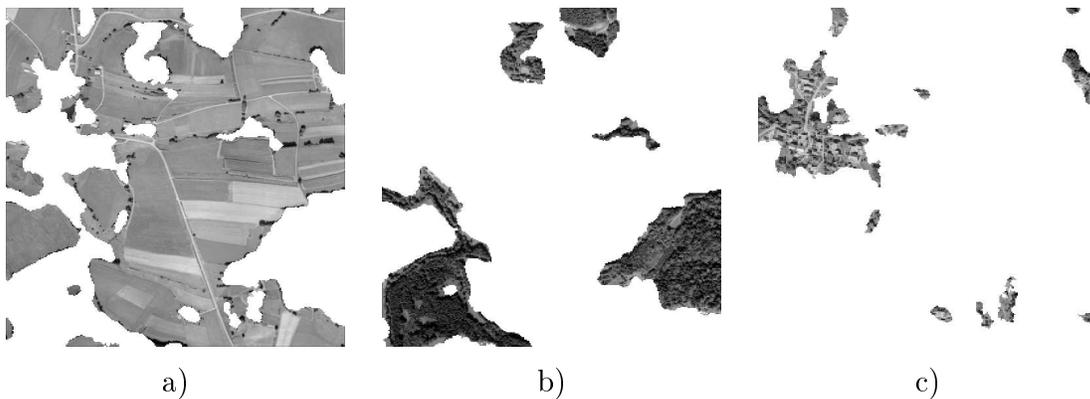


Fig. 10: Segmentation at low resolution: a) *open_rural* b) *forest* c) *suburb_urban*

4.2 Road Extraction in *open_rural* Area

To extract those parts of the road network which are in the *open_rural* context region, all road-parts, road-segments and intersections in *open_rural* area are selected. The goal is to close the gaps between the road-segments and to generate road-links, i.e., long road-segments connecting two intersections. Figure 11 shows an example for the input data to this step.



Fig. 11: a) Roadsides b) Road-segments

In *open_rural* area there are two main reasons for gaps: First, small gaps caused by the preceding steps (extraction of roadsides, construction of road-parts, etc.) and second, longer gaps caused by local disturbances, like single trees next to the road or branching driveways to the fields. Gaps of the first kind usually do not exceed more than a few meters, and can be closed if the road-segments are connected by an extracted roadside at one side. Gaps of the second kind can be handled using the context sketches *occlusion_shadow* and *rural_driveway*. If a gap can be explained by a context sketch, a road-part is constructed to connect the two road-segments (cf. Fig. 12a).

After this step, all road-segments ideally should connect two intersections, i.e., they are road-links, or they should end at the border of the *open_rural* area or the image. Road-segments with dead ends inside the *open_rural* area have to be checked whether they are really roads. To accept such road-segments as road-links, an important object like a building has to be close to the dead end.

Additional and very strong evidence for a road is gained from the extraction of road markings which appear as weak bright lines in the high resolution image. They are found using the line extractor described in Section 3.1 (cf. Fig. 12b). Of course, reasonable results are possible only because the line extraction is restricted to the



Fig. 12: a) Road-segments after closing gaps of second-kind b) Markings

hypothetic road area: Faint markings can only be found using very low thresholds, which would result in a plethora of lines for other parts of the image.

4.3 Outlook: Road Extraction in *suburb_urban* and *forest* Areas

For the extraction of roads in *suburb_urban* and *forest* areas road-segments of the *open_rural* area ending at the border to the other context regions can be used as reliable starting points for a road tracking into the *suburb_urban* and *forest* areas. Hypotheses for paths which connect the starting points are provided by the line extraction at low resolution. The road network is propagated from the border to the center of the *suburb_urban* and *forest* areas. In order to achieve good results, it will be necessary to integrate more context information, especially about high objects and shadows. This additional information will be employed by means of context sketches.

5 Summary

In this paper a multi-resolution approach for road extraction from aerial imagery is presented which makes use of local (sketch) and global (region) context information. The road model describes objects of the road network and relations between these objects and other objects. More specifically, roadsides are extracted by fusing the results of line extraction at low resolution and edge extraction at high resolution. From the result road-parts, road-segments, and intersections are constructed. These road objects have a clear semantics as well as attributes and methods for further reasoning. Integration of context regions restricts possible context sketches (i.e., relations to background objects) and makes the use of knowledge more effective.

Acknowledgments

This work is embedded in the joint research project *Semantic Modeling and Extraction of Spatial Objects from Images and Maps* and is funded by the Deutsche Forschungsgemeinschaft (DFG) under grant no. Eb 74–8/2.

References

- Barzohar M., D. Cooper (1996) *Automatic Finding of Main Roads in Aerial Images by Using Geometric–Stochastic Models and Estimation*, IEEE Transactions on Pattern Analysis and Machine Intelligence, Vol. 18, No. 7, pp. 707–721.
- Bordes G., G. Giraudon, O. Jamet (1995) *Road Extraction Guided by a Cartographic Database: Creating a Strategy*, International Conference on Computer Vision, Workshop on Context-Based Vision, pp. 30–37.
- de Gunst M. (1996) *Knowledge-Based Interpretation of Aerial Images for Updating of Road Maps*, Netherlands Geodetic Commission, Publications on Geodesy, New Series 44, Delft, The Netherlands.
- Grün A., H. Li (1996) *Linear Feature Extraction with LSB-Snakes from Multiple Images*, International Archives of Photogrammetry and Remote Sensing, Vol. (31) B3/III, pp. 266–272.
- Laws K. (1980) *Texture Image Segmentation*, PhD thesis, University of Southern California, Department of Engineering, Los Angeles.
- Matsuyama T., V.-S. Hwang (1990) *SIGMA - A Knowledge-Based Aerial Image Understanding System*, Plenum Press, New York.
- Mayer H., C. Steger (1996) *A New Approach for Line Extraction and its Integration in a Multi-Scale, Multi-Abstraction-Level Road Extraction System*, IAPR TC-7 Workshop: Mapping Buildings, Roads and other Man-Made Structures from Images, Oldenbourg Verlag, Wien, Austria, pp. 331–348.
- McKeown D., J. Denlinger (1988) *Cooperative Methods For Road Tracking In Aerial Imagery*, Computer Vision and Pattern Recognition, pp. 662–672.
- Merlet N., J. Zerubia (1996) *New Prospects in Line Detection by Dynamic Programming*, IEEE Transactions on Pattern Analysis and Machine Intelligence, Vol. 18, No. 4, pp. 426–431.
- Neuenschwander W., P. Fua, G. Székely, O. Kübler (1995) *From Ziplock Snakes to VelcroTM Surfaces*, Automatic Extraction of Man-Made Objects from Aerial and Space Images, Birkhäuser Verlag, Basel, Switzerland, pp. 105–114.
- Ruskoné R., L. Guigues, S. Airault, O. Jamet (1996) *Vehicle Detection on Aerial Images: A Structural Approach*, 13th International Conference on Pattern Recognition, Vol. III, pp. 900–903.

Ruskoné R., S. Airault, O. Jamet (1994) *A Road Extraction System Using the Connectivity Properties of the Network*, Zeitschrift für Photogrammetrie und Fernerkundung, Vol. 5/94, pp. 174–180.

Stark L., K. Bowyer (1991) *Achieving Generalized Object Recognition through Reasoning about Association of Function to Structure*, IEEE Transactions on Pattern Analysis and Machine Intelligence, Vol. 13, No. 10, pp. 1097–1104.

Steger C. (1996) *An Unbiased Detector of Curvilinear Structures*, Technical Report FGBV-96-03, Forschungsgruppe Bildverstehen (FG BV), Informatik IX, Technische Universität München.

Steger C., C. Glock, W. Eckstein, H. Mayer, B. Radig (1995) *Model-Based Road Extraction from Images*, Automatic Extraction of Man-Made Objects from Aerial and Space Images, Birkhäuser Verlag, Basel, Switzerland, pp. 275–284.

Strat T., M. Fischler (1995) *The Role of Context in Computer Vision*, International Conference on Computer Vision, Workshop on Context-Based Vision, pp. 2–12.

Tönjes R. (1996) *Knowledge Based Modelling of Landscapes*, International Archives of Photogrammetry and Remote Sensing, Vol. (31) B3/III, pp. 868–873.

Vosselman G., J. de Knecht (1995) *Road Tracing by Profile Matching and Kalman Filtering*, Automatic Extraction of Man-Made Objects from Aerial and Space Images, Birkhäuser Verlag, Basel, Switzerland, pp. 265–274.

Wiedemann C., H. Mayer (1996) *Automatic Verification of Roads in Digital Images Using Profiles*, Mustererkennung 1996, Springer-Verlag, Berlin, pp. 609–618.

Zlotnick A., P. Carnine (1993) *Finding Road Seeds in Aerial Images*, Computer Vision, Graphics, and Image Processing: Image Understanding, Vol. 57, pp. 243–260.